

KZS-2M A B16/0.01



Specificatii

Cod ETI	002173214
Descriere	KZS-2M A B16/0.01
Denumire clasă	Disjunctoare cu protecție diferențială (RCBO)
Curent nominal (A)	16A
Tip	A
Curent de defect nominal (A)	0.01A
Caracteristică de întrerupere	B
Număr de poli	1+N
Capacitatea de rupere (kA)	10kA
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm ² -25mm ²
Standarde	IEC/EN 61009

Pagina de produse online [🔗](#)

Alta documentatie



Catalog caracteristici tehnice

Certificate

Model 3D

2D mușchi

Manual de instrucțiuni



Declarație CE

Eplan mușchi

ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	230V
Rated insulation voltage U_i	500V
Rated current	16A
Rated fault current	0,01A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	Da
Width in number of modular spacings	2
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm ²
Connectable conductor cross section multi-wired	1...25mm ²

Desen cotat

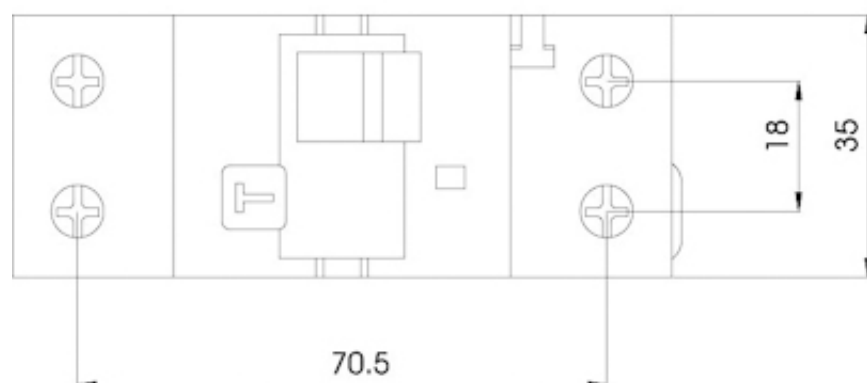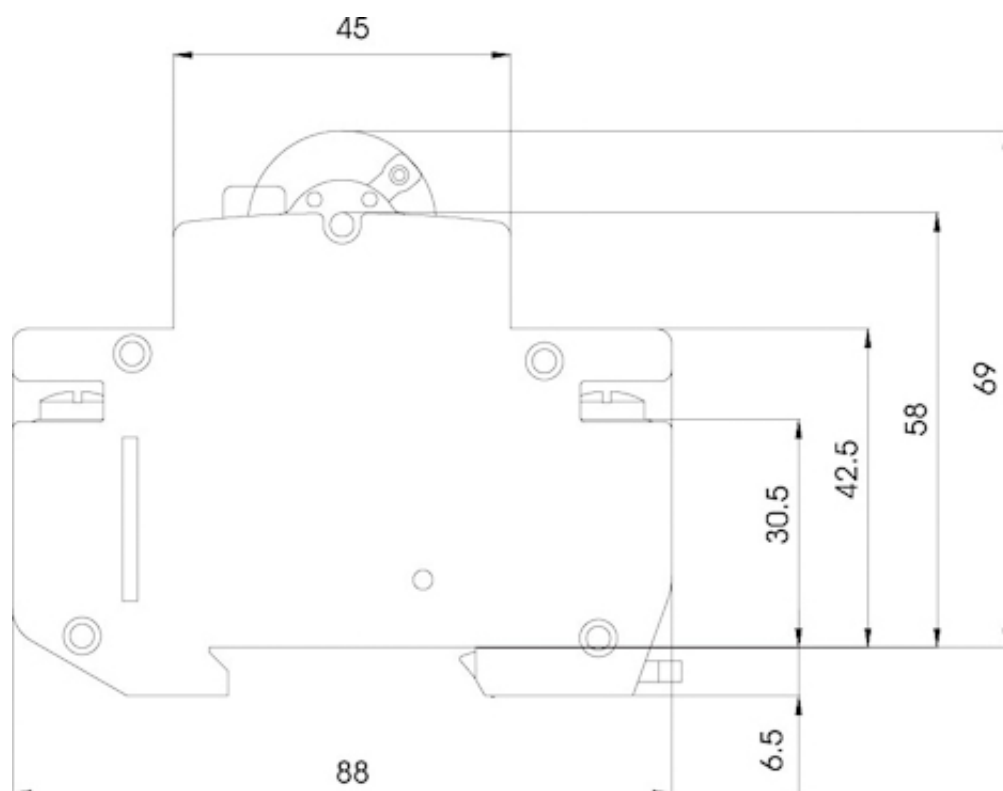

Simbol/Conexiune

