

KZS-1M-UNI 1p+N A B16/0.03



Specificatii

Cod ETI	002176024
Descriere	KZS-1M-UNI 1p+N A B16/0.03
Denumire clasă	Disjunctor cu protecție diferențială (RCBO)
Curent nominal (A)	16A
Tip	A
Curent de defect nominal (A)	0.03A
Caracteristică de întrerupere	B
Număr de poli	1+N
Capacitatea de rupere (kA)	6kA
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	110mm ²
Standarde	EN/IEC 61009-1

Pagina de produse online [🔗](#)

Alta documentatie



Catalog caracteristici tehnice

Model 3D

2D mușchi

Manual de instrucțiuni


Declarație CE

Eplan mușchi

ETIM clasificare internațională

Clasificare	EC000905
Denumire clasă	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	240V
Rated insulation voltage U_i	250V
Rated impulse withstand voltage U_{imp}	4kV
Rated current	16A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	6kA
Rated short-circuit breaking capacity according to IEC 60947-2	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 61009-1	6kA
Disconnection characteristic	Undelayed
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	Da
With interlocking device	Nu
Over voltage category	3
Pollution degree	2
Ambient temperature during operating	-35...40°C
Width in number of modular spacings	1
Built-in depth	70mm
Anti-nuisance tripping version	Nu
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...10mm ²
Connectable conductor cross section multi-wired	1...10mm ²

Desen cotat

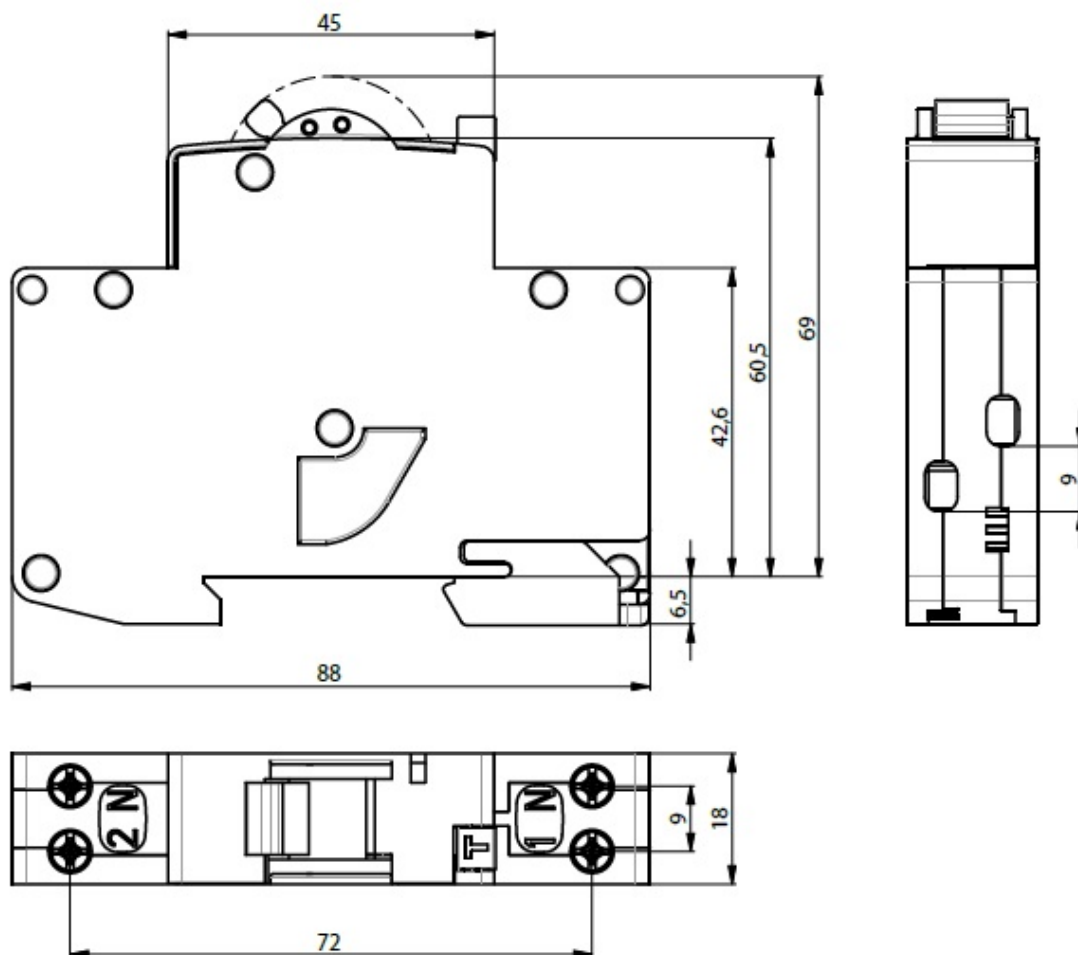

Simbol/Conexiune

