

EFI-P2 A 63/0.03



Specificatii

Cod ETI	002061113
Descriere	EFI-P2 A 63/0.03
Denumire clasă	Înterupător diferențial
Curent de defect nominal (A)	0.03A
Tip	A
Curent nominal (A)	63A
Adâncime (mm)	68mm
Tip montaj	TH 35
Număr de poli	1+N
Curent nominal de scurtcircuit Inc (kA)	10kA
Timp de declansare	Undelayed
Tensiune nominală AC (V)	230V/240V
Frecvență nominală (Hz)	50Hz/60Hz
Secțiune transversală nominală	1mm ² -25mm ²
Standarde	IEC/EN 61008
Grad de protecție IP	IP20

Pagina de produse online 

Alta documentatie



Catalog caracteristici tehnice

Certificate

Model 3D

2D mușchi

Manual de instructiuni

Declaratie CE



White paper

Eplan mușchi

ETIM clasificare internațională

Clasificare	EC000003
Denumire clasă	Residual current circuit breaker (RCCB)
Number of poles	2
Rated voltage	240V
Rated current	63A
Rated fault current	30mA
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	4kV
Mounting method	DIN rail
Leakage current type	A
Selective protection	Nu
Short-time delayed tripping	Nu
Short-circuit breaking capacity (I_{cw})	10kA
Surge current capacity	0,4kA
Frequency	50/60 Hz
Additional equipment possible	Da
Degree of protection (IP)	IP20
Width in number of modular spacings	2
Built-in depth	68mm
Ambient temperature during operating	-60...70°C
Pollution degree	2
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Desen cotat

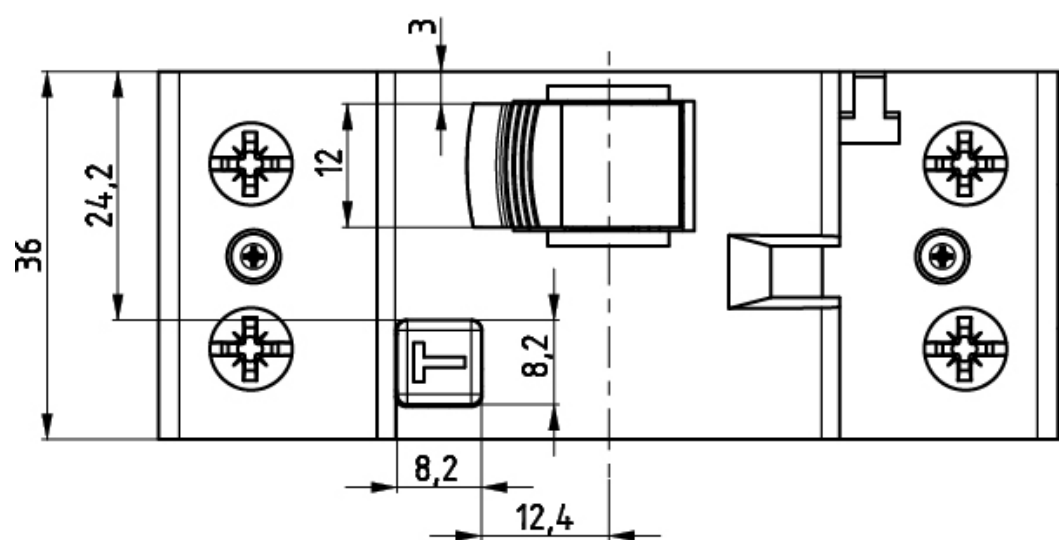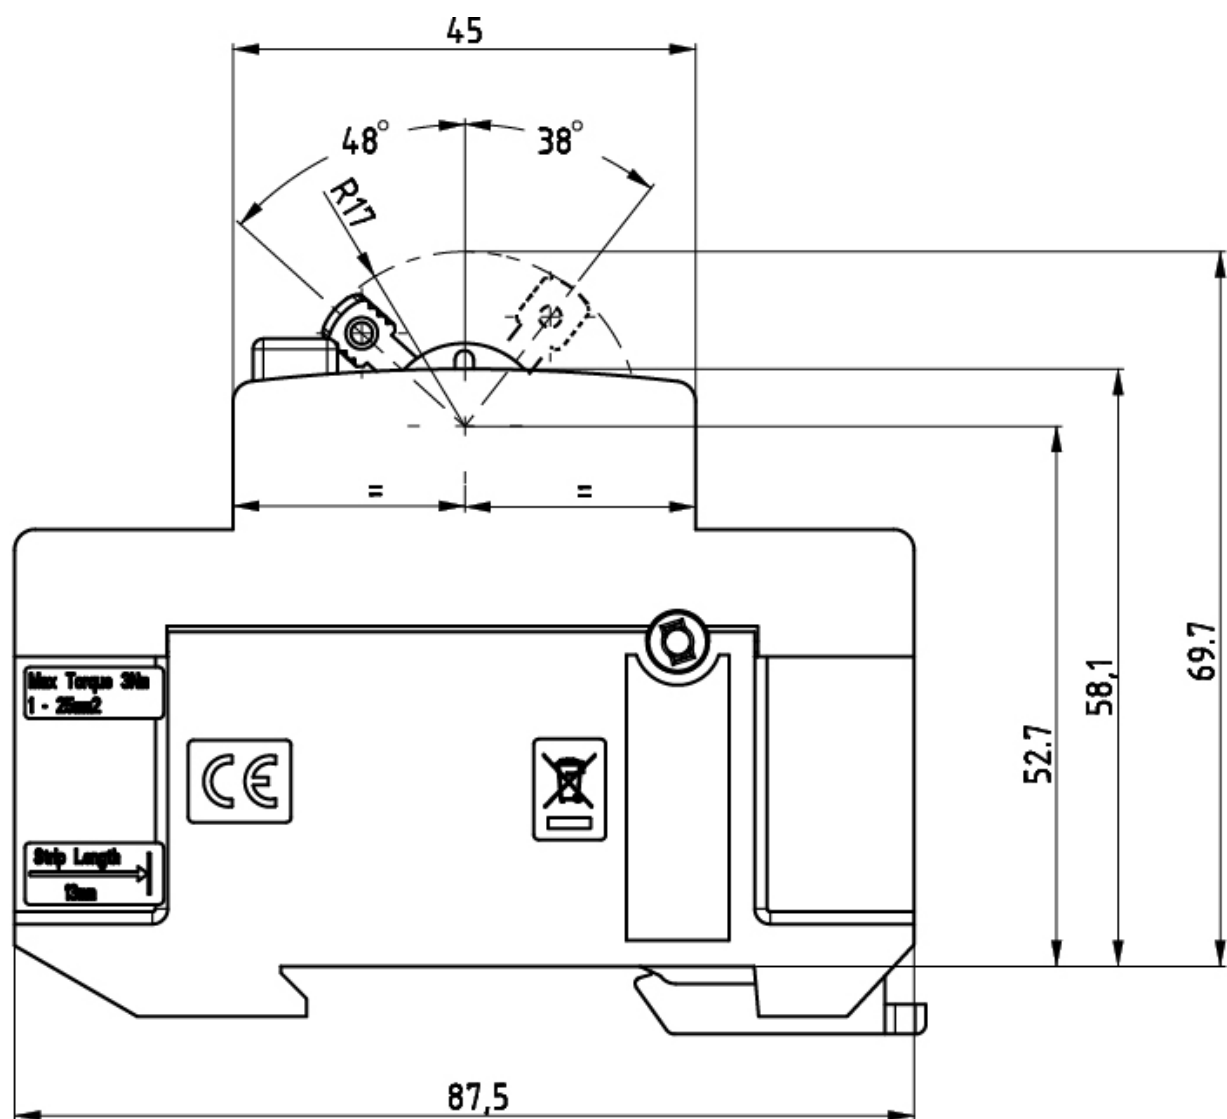

Schema de conexiuni

