

## ETIMAT P6 3p+N B25



## Specificatii

|                                            |                                     |
|--------------------------------------------|-------------------------------------|
| Cod ETI                                    | 001900412                           |
| Descriere                                  | ETIMAT P6 3p+N B25                  |
| Denumire clasă                             | Disjunctori miniaturali             |
| Curent nominal (A)                         | 25A                                 |
| Caracteristică de întrerupere              | B                                   |
| Număr de poli                              | 3+N                                 |
| Capacitatea de rupere (kA)                 | 6kA                                 |
| Tipul voltajului                           | AC                                  |
| Tensiunea nominală de rezistență Uimp (kV) | 6kV                                 |
| Tensiune nominală AC (V)                   | 415V                                |
| Frecvență nominală (Hz)                    | 50Hz/60Hz                           |
| Secțiune transversală nominală             | 1mm <sup>2</sup> -25mm <sup>2</sup> |
| Standarde                                  | 60898-1,60947-2                     |
| Funcție                                    | MCB                                 |

Pagina de produse online 

## Alta documentatie



Catalog caracteristici tehnice

Model 3D

2D mușchi

Manual de instrucțiuni


Declarație CE

Eplan mușchi


## ETIM clasificare internationala

|                                                                                  |                                 |
|----------------------------------------------------------------------------------|---------------------------------|
| Clasificare                                                                      | EC000042                        |
| Denumire clasă                                                                   | Miniature circuit breaker (MCB) |
| Release characteristic                                                           | B                               |
| Number of poles (total)                                                          | 4                               |
| Number of protected poles                                                        | 3                               |
| Rated current                                                                    | 25A                             |
| Rated voltage                                                                    | 415V                            |
| Rated insulation voltage $U_i$                                                   | 500V                            |
| Rated impulse withstand voltage $U_{imp}$                                        | 6kV                             |
| Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 230 V    | 6kA                             |
| Rated short-circuit breaking capacity $I_{cn}$ according to EN 60898 at 400 V    | 6kA                             |
| Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 230 V | 6kA                             |
| Rated short-circuit breaking capacity $I_{cu}$ according to IEC 60947-2 at 400 V | 6kA                             |
| Voltage type                                                                     | AC                              |
| Frequency                                                                        | 50...60Hz                       |
| Current limiting class                                                           | 3                               |
| Suitable for flush-mounted installation                                          | Da                              |
| Concurrently switching neutral conductor                                         | Da                              |
| Over voltage category                                                            | 3                               |
| Pollution degree                                                                 | 2                               |
| Additional equipment possible                                                    | Da                              |
| Width in number of modular spacings                                              | 4                               |
| Built-in depth                                                                   | 70mm                            |
| Degree of protection (IP)                                                        | IP20                            |
| Ambient temperature during operating                                             | -40...70°C                      |
| Connectable conductor cross section multi-wired                                  | 1...25mm <sup>2</sup>           |
| Connectable conductor cross section solid-core                                   | 1...25mm <sup>2</sup>           |

# Caracteristicile energiei de topire

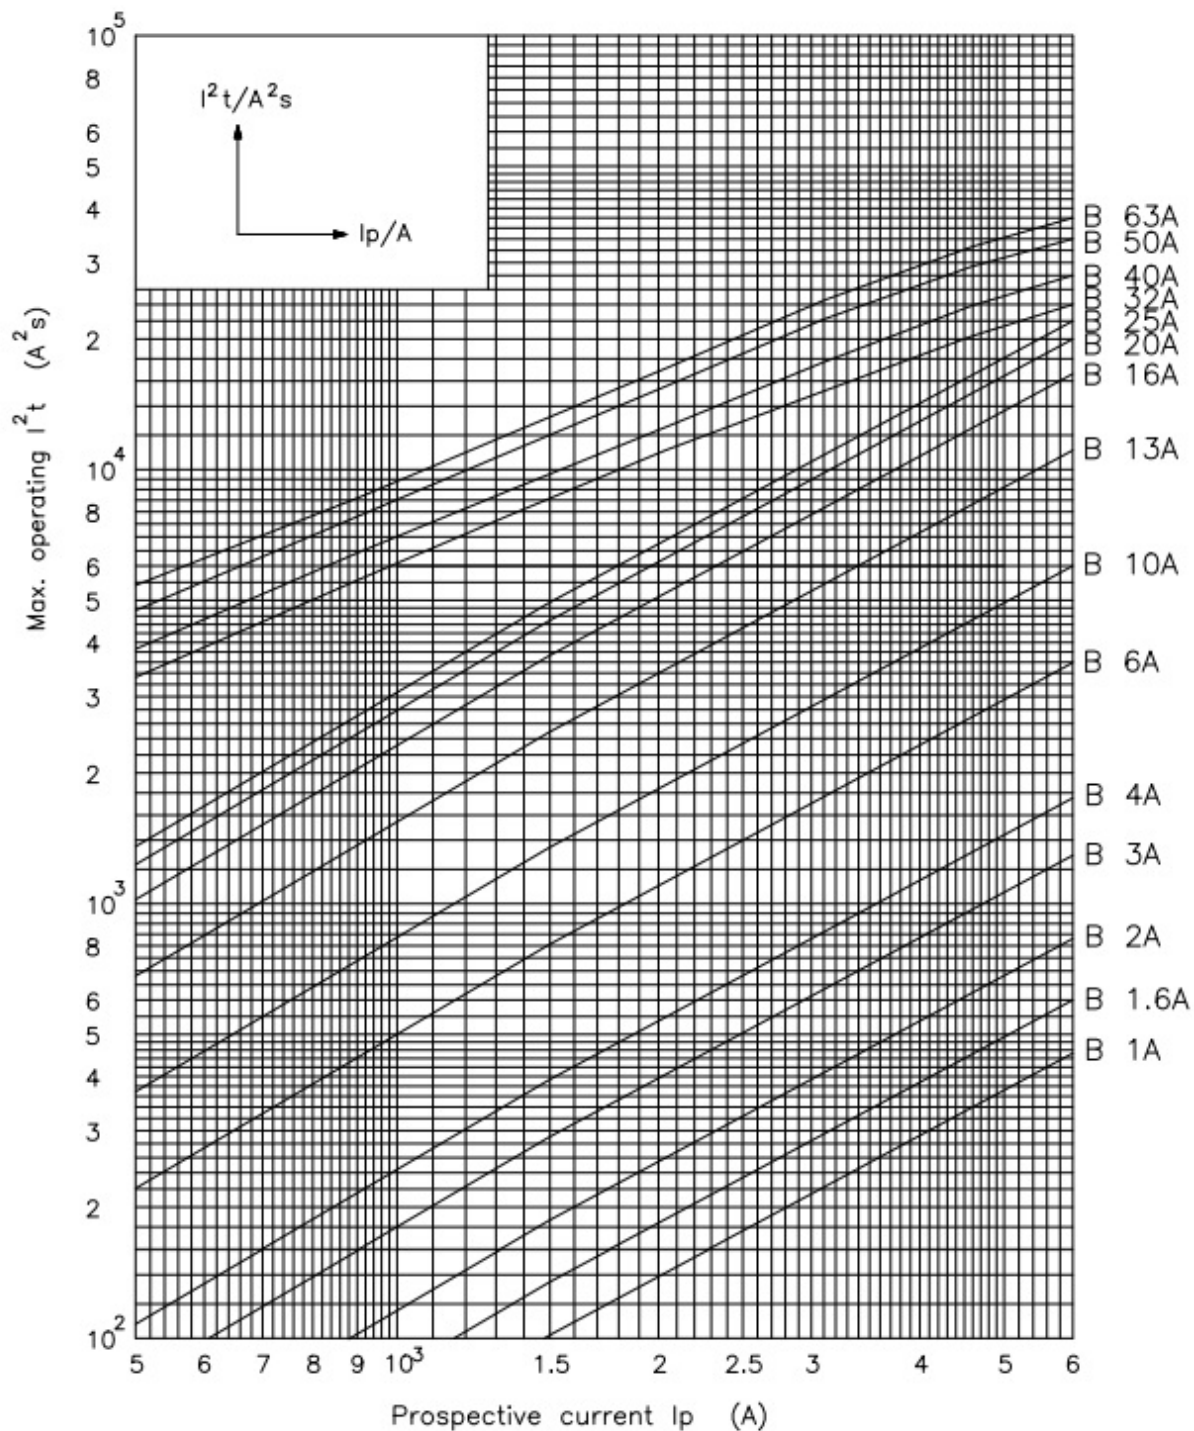

## Desen cotat

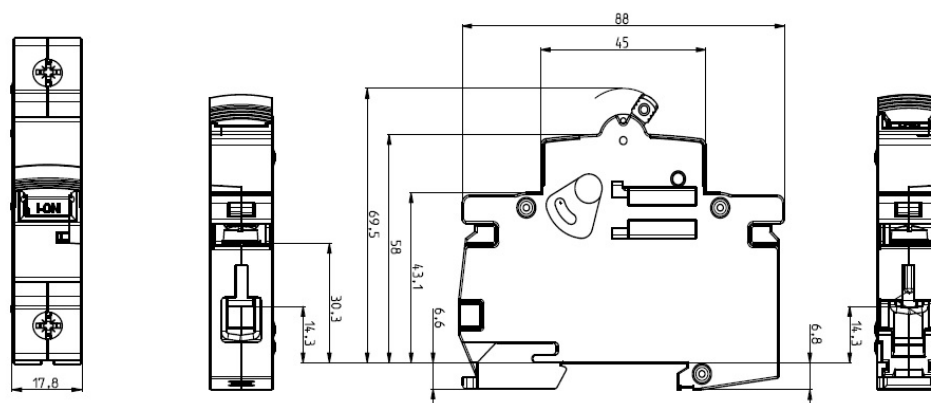

## Simbol/Conexiune

1p




1p+n



2p



3p



3p+n

